

E-WF T05 Series

LED Traditional Style Wall Pack - Small
Replaces 150W PSMH



Classic, traditional-style fixture, now with greater output and increased efficiency!

Efficient

- Uses 45% less energy than comparable HID fixtures
- Quick, easy installation

Durable

- Lens is heat and shock resistant
- Powder-coat finish withstands the test of time

Recommended Use

- Security
- Pathways
- Perimeter lighting

Input Voltage


- Universal (120V through 277V Operation)

Certifications



Quality Products, Affordably Priced.

E-WFT05 Series

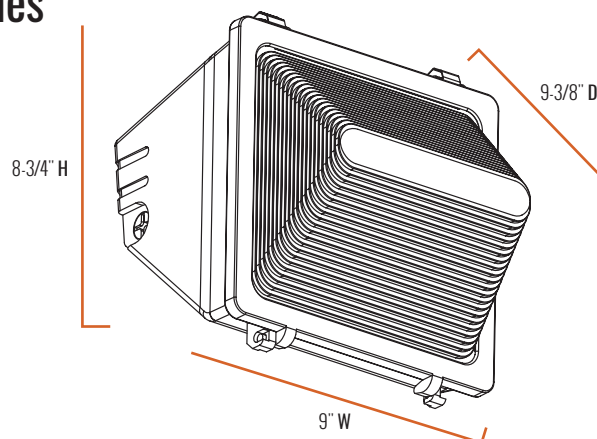

Series Overview

| DIMENSIONS | PRODUCT WEIGHT | MOUNTING HEIGHT | SPACING |
|----------------------------|----------------|-----------------|----------------------------------|
| 9-3/8" D x 9" W x 8-3/4" H | 6.4 lbs. | 8 to 18 feet | 2 to 3 times the mounting height |

Fixture Specifications

| | |
|----------------------|--|
| HOUSING | Heavy duty, die-cast aluminum housing with hinged door frame Dark bronze polyester powder-coat finish |
| LENS ASSEMBLY | Heat and shock-resistant borosilicate glass prismatic lens |
| MOUNTING | 1/2" NPT tapped knockouts for conduit entrances (one on top, one on each side, one on back) |


Electrical Performance

| OPERATING MINIMUM | LIFESPAN <small>L₇₀ AT 25°C (77°F)</small> | POWER FACTOR | TOTAL HARMONIC DISTORTION | DIMMABLE |
|----------------------|--|--------------|---------------------------|-------------|
| -40°C (-40°F) | Estimated >100,000 Hours | > 0.9 | < 20% | No |
| INPUT VOLTAGE | 120V | 208V | 240V | 277V |
| Current Draw (Amps) | 0.40A | 0.23A | 0.20A | 0.17A |

Warranty & Certifications

| WARRANTY | UL LISTED | DLC | ENERGY STAR |
|----------------|---------------|-----|-------------|
| 5-Year Limited | Wet Locations | Yes | --- |

CORRELATED COLOR TEMPERATURE (CCT)

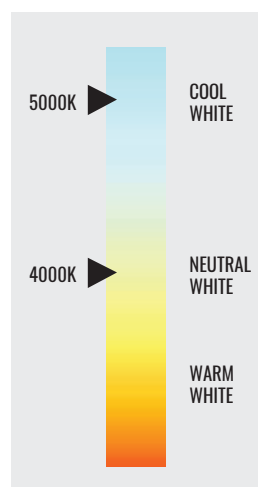

Output Specifications

| SKU | LIGHT OUTPUT | COLOR TEMP (See chart) | POWER CONSUMPTION | COLOR ACCURACY | REPLACES |
|----------------------|--------------|---------------------------|-------------------|----------------|-----------|
| E-WFT05A-N50Z | 5000 Lumens | Cool White (5000K) | 48W | ≥ 70 CRI | 150W PSMH |
| E-WFT05A-N40Z | 5000 Lumens | Neutral White (4000K) | 48W | ≥ 70 CRI | 150W PSMH |

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 04/14/17

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com



E-WFT05 Series

Accessories




Photocell -Button, 120V/208V/240V/277V

SKU: **E-ACP1** (120V)

E-ACP2 (208V/240V/277V)

USE: Photocell is field installed.
Drilling of the back box in the field is required.

Photometric Diagrams

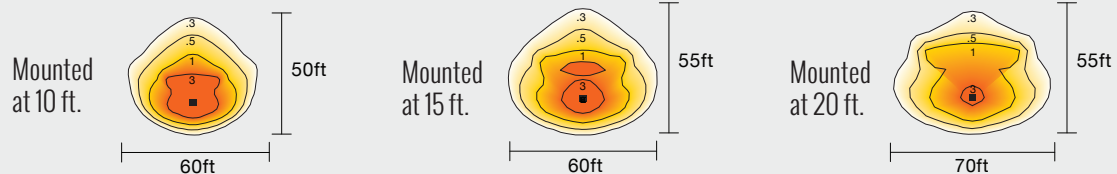

All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture.



WARNING: Cancer and Reproductive Harm -
www.p65warnings.ca.gov

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 04/14/17

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

e-conolight®