

E-WC Series

LED Cylinder
Replaces 60W Incandescent



Classic Residential Look & Feel

e-conolight's LED Cylinder fixture provides exceptional security lighting, while reducing energy and maintenance costs. Its traditional design and long lifetime makes it a smart upgrade choice.

Value

- Built-in photocell
- Long lifetime - up to 172,000 hours

Low Maintenance

- Fully-gasketed lens keeps bugs out
- No relamping required

Recommended Use

- Security
- Pathways
- Perimeter lighting


Input Voltage

- 120V Operation with built-in photocell

Certifications



E-WC Series

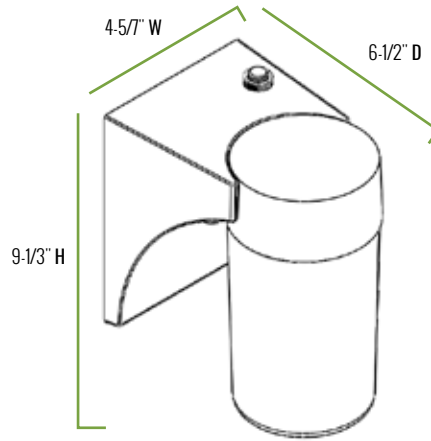

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
6-1/2" D x 4-5/7" W x 9-1/3" H	2.12 lbs.	6 to 10 feet	---

Fixture Specifications

HOUSING	Die-cast aluminum housing Available in dark bronze or white finish
LENS ASSEMBLY	Screw-in polycarbonate lens
MOUNTING	Bracket with threaded nipple mounts to standard 3" or 4" octagonal junction box


Electrical Performance

OPERATING MINIMUM	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated 172,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.18A	---	---	---

Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
5-Year Limited	Wet Locations	---	---

CORRELATED COLOR TEMPERATURE (CCT)

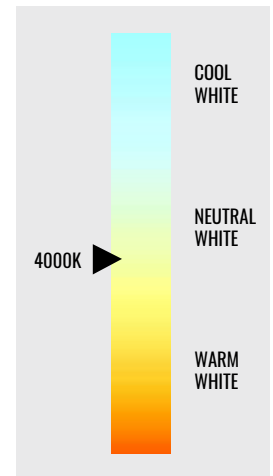

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP <small>(See chart)</small>	POWER CONSUMPTION	COLOR ACCURACY	REPLACES
E-WC1L21NZP	595 Lumens	Neutral White (4000K)	22W	≥ 70 CRI	60W Incandescent
E-WC1L21NWP	595 Lumens	Neutral White (4000K)	22W	≥ 70 CRI	60W Incandescent



WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 05/03/16

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

