

E-WF2 Series

LED Architectural Slim Wall Pack / Flood - Large
Replaces 250W MH / 400W MH



Exceptional illumination for your entire building perimeter with a consistent look.

Recommended Use

- Security
- Perimeter Lighting
- When control of spill light is important
- Flood and uplighting with adjustable mounting accessories

Input Voltage

- Universal (120V through 277V Operation)

Versatile

- Floodlight - Wall Mounted (use E-ACUWF2Z)
- Floodlight - Pole Mounted (use E-ACSWF2Z)
- Floodlight - Ground Mounted (use E-ACSBWFZ)
- Wall Pack - Wall Mounted (use E-ACWF1/2Z)

Certifications

CREE 
LEDs

5 YEAR
WARRANTY

SUITABLE FOR
WET
LOCATIONS


UL
LISTED

DLC
EFFECT



Quality Products, Affordably Priced.

E-WF2 Series

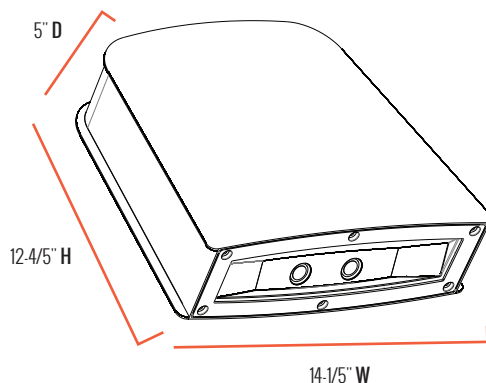

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
5" D x 14-1/5" W x 12-4/5" H	11.2 lbs. (80W) 12.2 lbs. (150W)	8 to 25 feet	1 to 2 times the mounting height

Fixture Specifications

HOUSING	Sturdy, die-cast aluminum housing Dark bronze polyester powder-coat finish
LENS ASSEMBLY	Tempered glass lens is thermal, shock & impact resistant
MOUNTING	Included mounting plate mounts over 4" square or octagonal junction box


Electrical Performance

OPERATING MINIMUM	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated 133,000 Hours (150W) 50,000 Hours (80W)	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.66A (40W) 1.25A (60W)	0.38A (40W) 0.72A (60W)	0.33A (40W) 0.63A (60W)	0.28A (40W) 0.54A (60W)

Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
5-Year Limited	Wet Locations	Yes	---

CORRELATED COLOR TEMPERATURE (CCT)

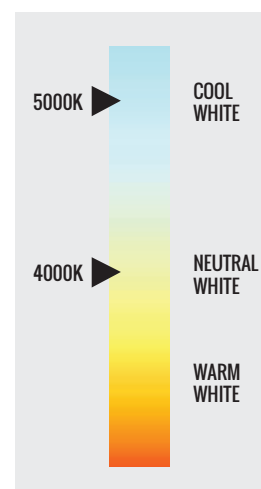

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP (See chart)	POWER CONSUMPTION	COLOR ACCURACY	REPLACES
E-WF2L08CZ	8110 Lumens	Cool White (5000K)	80W	≥ 70 CRI	250W MH
E-WF2L08NZ	8110 Lumens	Neutral White (4000K)	80W	≥ 70 CRI	250W MH
E-WF2L15CZ	15,800 Lumens	Cool White (5000K)	150W	≥ 70 CRI	400W MH
E-WF2L15NZ	15,800 Lumens	Neutral White (4000K)	150W	≥ 70 CRI	400W MH

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 05/18/18

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com



E-WF2 Series

Accessories



Photocell - Button, 120V/208V/240V/277V

SKU: **E-ACP1** (120V)

E-ACP2 (208V/240V/277V)

USE: Can only be installed with one of the mounting accessories listed. Photocell is field installed and drilling of the back box is required.



Surface Mounting Box

SKU: **E-ACSBWFZ**

USE: For use where there is no existing junction box or for easy through-wiring



2" Adjustable Slip Fitter

SKU: **E-ACSWF2Z**

USE: Fits over 2-3/8" O.D. pipe




Adjustable U-Bracket

SKU: **E-ACUWF2Z**

USE: Comes with 24" cord

Photometric Diagrams

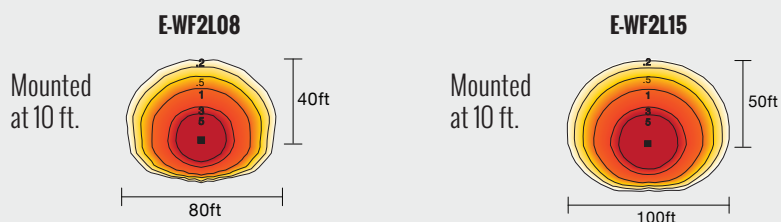

All published photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. Fixture photometry was completed on a single representative fixture.