

E-XML1 Series

LED Standard Emergency Light with Two Adjustable Heads



Easy Install

- Quick connect back plate fits most standard junction boxes
- Snaps into place for easy surface mounting

Input Voltage

- 120V or 277V Operation

Recommended Use

- General purpose emergency lighting
- Indoor commercial, retail & industrial applications
- Flexibility of additional remote locations

Certifications

5 YEAR
WARRANTY

DAMP
LOCATION SUITABLE



On all Exit &
Emergency fixtures
with nickel cadmium
batteries




WARNING: Cancer and Reproductive Harm -
www.p65warnings.ca.gov



Quality Products, Affordably Priced.

E-XML1 Series

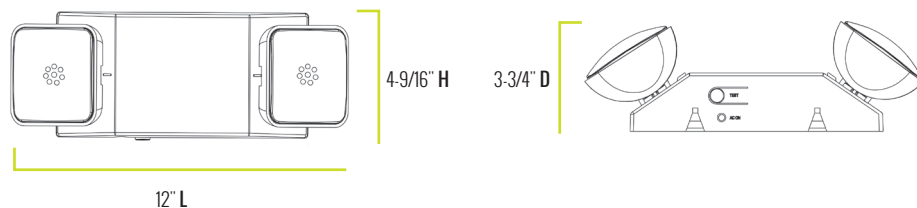

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
3-3/4" D x 12" L x 4-9/16" H	1.7 lbs. 2.0 lbs. (Remote Capable)	---	---

Fixture Specifications

HOUSING	Injection-molded, 5VA flame retardant thermoplastic housing
MOUNTING	Quick-connect back plate makes surface mounting to standard junction box easy Snaps into place making internal electrical connections Top knockout for conduit applications Suitable for wall or ceiling mount
INCLUDES	Two adjustable 1W LED lampheads Sealed, 3.6V maintenance-free nickel cadmium battery backup (Minimum 90 minute emergency illumination) Charge/power on LED indicator (battery recharges within 24 hours via internal solid state, two rate charger) Push to test switch
CERTIFICATIONS	Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

Electrical Performance

OPERATING MINIMUM / MAXIMUM	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
0°C (32°F) - 50°C (122°F)	---	---	---	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.022A (E-XML1W)	---	---	0.010A (E-XML1W)
	0.025A (E-XML1RCW)			0.012A (E-XML1RCW)

Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
5-Year Limited (Housing & Electronics) 5-Year Pro-Rated (Battery)	Damp Locations	---	---




Output Specifications

SKU	DESCRIPTION	POWER CONSUMPTION	LIGHT OUTPUT
E-XML1W	Standard Emergency Light w/Two Adjustable Heads	1.8W at 120V and 277V	45 Lumens
E-XML1RCW	2.1W Emergency Light 3.6V Remote Capable*	2.1W at 120V and 277V	45 Lumens

* Remote unit 3W, 3.6V remote capability. (see page 3)

E-XML1 Series

Remote Heads

SINGLE REMOTE HEAD	SKU / DESCRIPTION	DOUBLE REMOTE HEAD	SKU / DESCRIPTION
	E-XHL1DW 1W Single Remote Head (White)		E-XHL2DW 1W Double Remote Head - 2W Total (White)
	E-XHL1WG 1W Single Remote Head, Wet-Listed (Gray)		E-XHL2WG 1W Double Remote Head - 2W Total, Wet-Listed (Gray)