


## DESCRIPTION

naturalLED® Commercial Wrap (CWS) now offers the perfect solution for your lighting needs. The Commercial utility wrap fixtures are designed for saving energy and easy installation. Available in 38W with CCT of 4,000K; delivering up to 5,275 lumens with excellent and consistent color.

Our Commercial Utility Wrap features a full wrap-around UV coated PS plastic prismatic lens and is 48 inches long; designed for junction box installation and works great in parking garages, stairwells, offices, hallways, industrial, commercial and residential, ceiling or wall mounted. This fixture is versatile and efficient.

CWS  
9" Wide

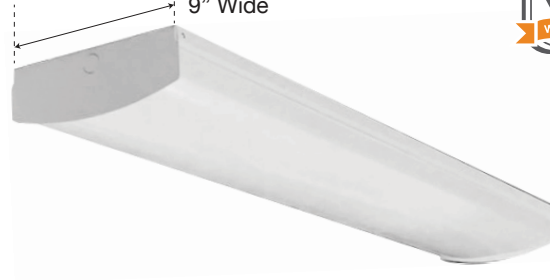

## FEATURES

- DLC Premium
- For damp location
- ETL Listed
- Lightweight for easy installation
- Excellent thermal design
- Uniform and consistent color
- Long Life LED chips
- UV Coated Frosted Polycarbonate
- Input line voltage: 120-277V
- Input Current: 0.34A
- Power Factor: >0.9
- CRI: 80
- Dimmable: 1-10V
- Beam Angle: Flood
- Operating temperature: -22°F ~ 122°F
- Rated 50,000 hours average life

## ACCESSORIES


Emergency Driver



Motion/ Daylight Sensor



Wire Guard



## APPLICATIONS

- Conference/Meeting Rooms
- Stairwells
- Schools/Universities
- Hospitals
- Hotels
- Parking Garages

## WARRANTY

- 5 Year Warranty

### Ordering Information

EXAMPLE: LED-FXCWS38/48FR/840

LED	FX	CWS	38	48	FR	840
LED	Category	Series	Wattage	Size	Lens	CRI/ Color Temp
	FX	CWS	38 38 Watt	48 48-inch	FR Frosted	8 CRI 80
	Fixture	Commercial Wrap				40 4000K


## ORDERING

## COMMERCIAL WRAP (CWS)

\*P= DLC Premium / S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Size	Beam Angle	Rated Hrs	Dimmable	Damp Location	DLC (P/S)
36	9289	LED-FXCWS38/48FR/840	4000K	5,275	4 x 32W T8	9" x 48"	Flood	50,000	1-10V	•	P

## SPECIFICATIONS

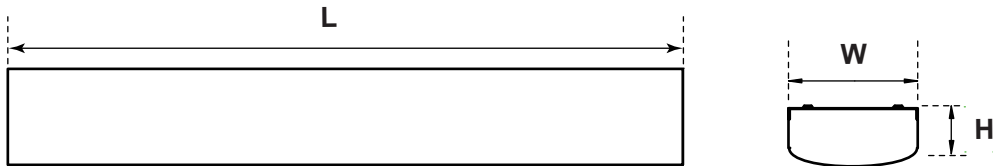

Wattage	Length (L)	Width (W)	Height (H)	Weight (lbs)
36W	48" (1219mm)	9" (228.6mm)	3.15" (80mm)	8.4

## MOUNTING / ACCESSORIES

SOLD SEPARATELY

### Emergency Driver

- 7334 BAEM15-48BC/MV-A (Emergency Driver)




### Motion/Daylight Sensor

- P10234 SEN-MC605V-D (Microwave Sensor)




### Wire Guard

- P10252 WG-CWS/48/WH (Wireguard)

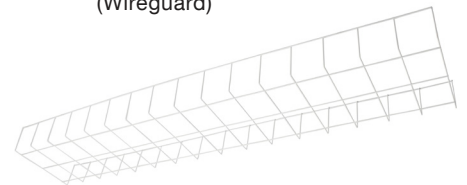

## PHOTOMETRICS CHART

CWS38 (36 Watt)



Illuminance at a Distance			
	Center Beam fc	Beam Width	
2.5R	285 fc	6.0 ft	7.3 ft
5.0R	71.4 fc	12.0 ft	14.5 ft
7.5R	31.7 fc	18.0 ft	21.8 ft
10.0R	17.8 fc	24.0 ft	29.1 ft
12.5R	11.4 fc	30.1 ft	36.3 ft
15.0R	7.93 fc	36.1 ft	43.6 ft

■ Vert. Spread: 100.5°  
 ■ Horiz. Spread: 110.9°

## PACKAGE

Master Pack: 1 pc

