




E-DDO SERIES

LED Dusk to Dawn Light
Replaces up to 175W MH

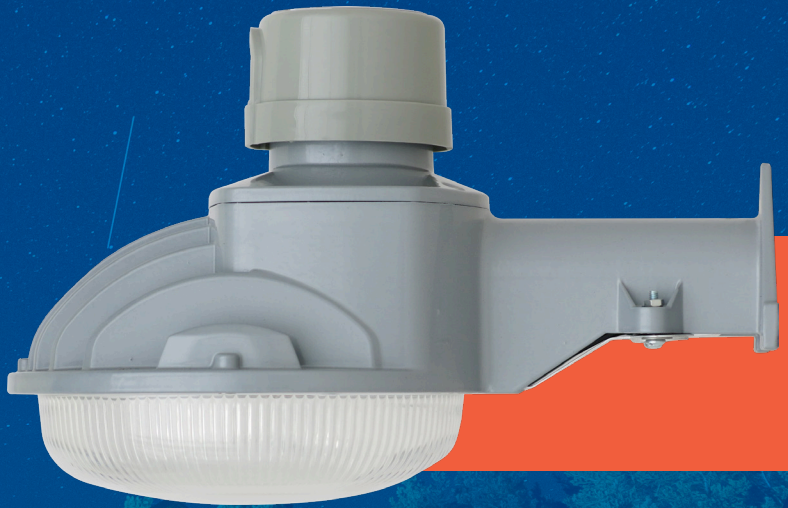

Effortless Efficiency

Our cULus Listed E-DDO Series savr LED Dusk to Dawn Light features an industry-leading 144 LPW, a UV-stabilized acrylic prismatic refractor, and direct mounting hardware for an easy installation. A light-sensitive photocell automatically turns the fixture on at night and off in the morning, resulting in maximum energy savings. Available in 4000K and 5000K. Delivers up to 6800 lumens and backed by our trusted 5-year warranty.

Features & Benefits

- Product comes standard with the photocell
- An industry leading 144 LPW (lumens per watt)
- UV-stabilized acrylic prismatic refractor
- Direct mounting hardware included

Recommended Use

- Security
- Area Lighting
- Service Roads
- General Area Lighting
- Yard and Dock Illumination

Input Voltage

- Universal (120V through 277V Operation)

Certifications




***WARNING:** Cancer and Reproductive Harm -
www.p65warnings.ca.gov




E-DDO SERIES

E-DD05B

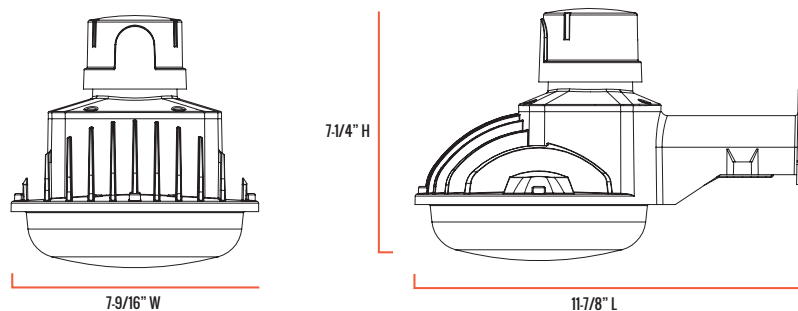

E-DD06B

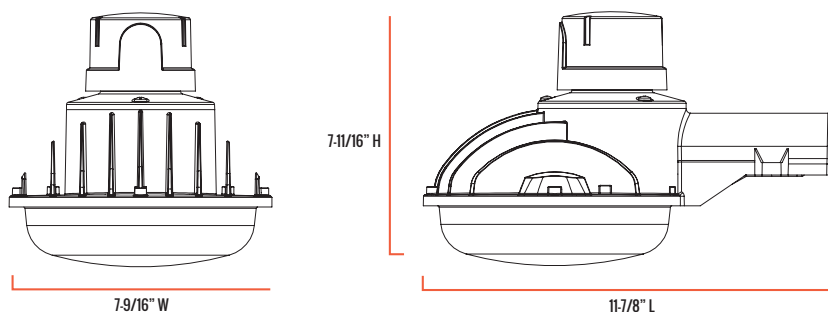

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
E-DD05B: 11-7/8" L X 7-9/16" W X 7-1/4" H	2.85 lbs.	12-25 Feet	4 to 5 times the mounting height
E-DD06B: 11-7/8" L X 7-9/16" W X 7-11/16" H	4.1 lbs.	12-30 Feet	4 to 5 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	Gray, durable, die-cast aluminum
LENS ASSEMBLY	UV-stabilized acrylic prismatic refractor
MOUNTING	Direct mounting hardware included Mounts directly or with mounting arm (Sold separately as an accessory) Mounts to pole diameter 1-5/8" - 1-3/4"

WARRANTY & CERTIFICATIONS


WARRANTY	5-Year Limited
cULus LISTED	Wet Locations
DLC	—

E-DDO SERIES

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	LIFESPAN L70 AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°F to 104°F (-40°C to 40°C)	Estimated >84,000 Hours	> 0.99	<20%	No

INPUT VOLTAGE Current Draw (Amps)	SKU	120V	208V	240V	277V
Current Draw (Amps)	E-DD05B	0.32A	0.19A	0.17A	0.15A
	E-DD06B	0.40A	0.24A	0.21A	0.19A

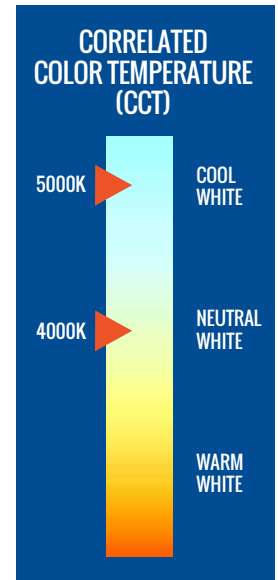

OUTPUT SPECIFICATIONS

SKU	REPLACES	LIGHT OUTPUT	COLOR TEMP	POWER CONSUMPTION	COLOR ACCURACY
E-DD06B-T540G	175W MH	6800 Lumens	4000K	47W LED	≥ 70
E-DD06B-T550G	175W MH	6800 Lumens	5000K	47W LED	≥ 70
E-DD05B-T550G	175W MH	5200 Lumens	5000K	36W LED	≥ 70

ACCESSORIES (SOLD SEPARATELY)



Mounting Arm Kit
SKU: C-ACC-A-SMDDPOLE-GR
USE: For pole mounting

© 2023 Cree Lighting, a company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. The savr logo is a registered trademark of e-conolight, LLC. The cULus logo is a registered trademark of UL LLC.

e-conolight/savr/C-Lite:
e-conolight.com | Customer Service: 888-243-9445 | Fax: 262-504-5409
1501 96th Street, Sturtevant, WI 53177

Cree Lighting US / C-Lite Distribution Sales:
creelighting.com | Distribution/Sales: 855-617-2733
9201 Washington Avenue, Racine, WI 53406

February 17, 2023 For informational purposes only. Content is subject to change.

