



## E-HTA SERIES

LED Round UFO High Bay Light  
Replaces up to 400W MH



The E-HTA LED Round UFO High Bay Light delivers up to 24,500 lumens in 4000K and 5000K. With a sleek look and driver-on-board design, it's perfect for applications where aesthetics are important. Estimated to last over 50,000 hours of maintenance-free operation, it's cETLus and FCC listed, as well as IP65 rated.

### Features & Benefits

- Durable die-cast aluminum housing and heat dissipating fins for excellent thermal control
- IP65, cETLus and FCC Listed
- 5-year limited warranty
- Lightweight design

### Recommended Use

- Warehouses
- Industrial
- Retail
- Gymnasiums
- Commercial

### Input Voltage

- Universal (120V through 277V Operation)


### Certifications



 **WARNING:** Cancer and Reproductive Harm - [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)



# E-HTA SERIES

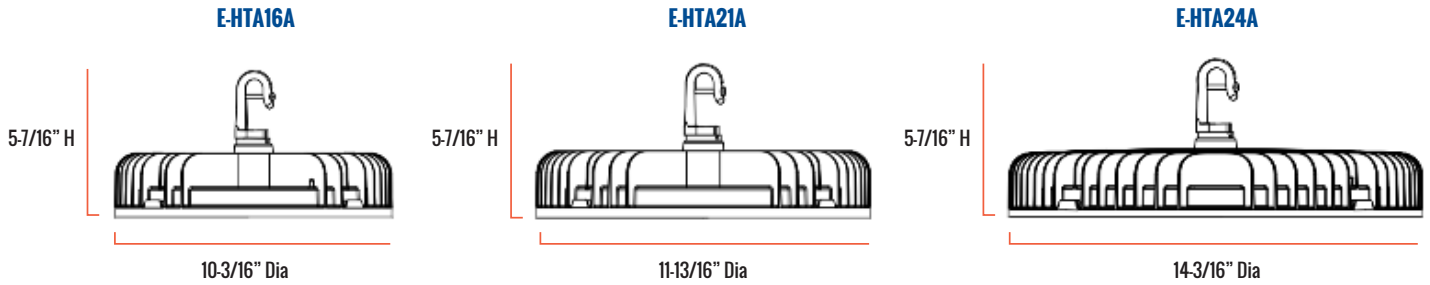

## SERIES OVERVIEW

| DIMENSIONS                               | PRODUCT WEIGHT | MOUNTING HEIGHT | SPACING                                    |
|--|----------------|-----------------|--|
| <b>E-HTA16:</b> 5-7/16" H X 10-3/16" DIA | 4.78 lbs.      | 12-18 feet      | Should not exceed 1.3x the mounting height |
| <b>E-HTA21:</b> 5-7/16" H X 11-3/16" DIA | 6.19 lbs.      | 15-25 feet      | Should not exceed 1.3x the mounting height |
| <b>E-HTA24:</b> 5-7/16" H X 14-3/16" DIA | 8.77 lbs.      | 18-30 feet      | Should not exceed 1.3x the mounting height |

## FIXTURE SPECIFICATIONS


|                      |   |
|----------------------|---|
| <b>HOUSING</b>       | Durable die-cast aluminum housing with heat dissipating fins. Aluminum extruded heat sink and die-cast housing. Black polyester powder-coat finish. |
| <b>LENS ASSEMBLY</b> | Tempered glass  |
| <b>MOUNTING</b>      | Included hook and 3-foot cord   |

## WARRANTY & CERTIFICATIONS

|                      |                |
|----------------------|----------------|
| <b>WARRANTY</b>      | 5-Year Limited |
| <b>cETLus LISTED</b> | Wet locations  |
| <b>DLC</b>           | -              |

## ELECTRICAL PERFORMANCE

| OPERATING TEMPERATURE RANGE                         | LIFESPAN<br><small>(L70 AT 25°C (77°F))</small> | POWER FACTOR | TOTAL HARMONIC DISTORTION | DIMMABLE |
|---|---|--------------|---------------------------|----------|
| 104°F (40°C) to -31°F (-35°C)                       | Estimated >50,000 Hours                         | > 0.9        | < 20%                     | No       |
| INPUT VOLTAGE<br><small>Current Draw (Amps)</small> | 120V  | 208V         | 240V                      | 277V     |
| E-HTA16A  | 1.25A   | .72A         | .62A                      | .54A     |
| E-HTA21A  | 1.66A   | .96A         | .83A                      | .72A     |
| E-HTA24A  | 2A  | 1.15A        | 1A                        | .86A     |

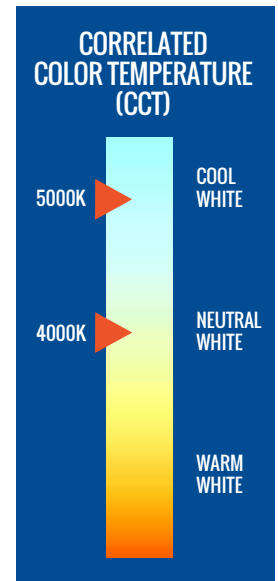

e-conolight / savr / C-Lite:  
e-conolight.com | Customer Service: 888-243-9445 | Fax: 262-504-5409  
1501 96th Street, Sturtevant, WI 53177

Cree Lighting US / C-Lite Distribution Sales:  
creelighting.com | Distribution/Sales: 855-617-2733  
9201 Washington Avenue, Racine, WI, 53406

## E-HTA SERIES

### OUTPUT SPECIFICATIONS

| SKU                    | REPLACES            | LIGHT OUTPUT  | COLOR TEMP | POWER CONSUMPTION | COLOR ACCURACY |
|------------------------|---------------------|---------------|------------|-------------------|----------------|
| <b>E-HTA24A-HK40UK</b> | 400W PSMH           | 24,500 Lumens | 4000K      | 240W              | ≈ 80           |
| <b>E-HTA24A-HK50UK</b> | 400W PSMH           | 24,500 Lumens | 5000K      | 240W              | ≈ 80           |
| <b>E-HTA21A-HK40UK</b> | 320W PSMH / 400W MH | 21,000 Lumens | 4000K      | 200W              | ≈ 80           |
| <b>E-HTA21A-HK50UK</b> | 320W PSMH / 400W MH | 21,000 Lumens | 5000K      | 200W              | ≈ 80           |
| <b>E-HTA16A-HK40UK</b> | 320W PSMH / 400W MH | 16,700 Lumens | 4000K      | 150W              | ≈ 80           |
| <b>E-HTA16A-HK50UK</b> | 320W PSMH / 400W MH | 16,700 Lumens | 5000K      | 150W              | ≈ 80           |

© 2020 Cree Lighting, a company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. The savr logo is a trademark of e-conolight, LLC. The ETL Listed Intertek logo is a trademark of Intertek Testing Services NA, Inc.

**e-conolight / savr / C-Lite:**  
e-conolight.com | Customer Service: 888-243-9445 | Fax: 262-504-5409  
1501 96th Street, Sturtevant, WI 53177

**Cree Lighting US / C-Lite Distribution Sales:**  
creelighting.com | Distribution/Sales: 855-617-2733  
9201 Washington Avenue, Racine, WI, 53406

April 20, 2021

For informational purposes only. Content is subject to change.

