




## E-LWNO4A SERIES

### 4-foot LED Wrap Light

Replaces 2-lamp F32T8

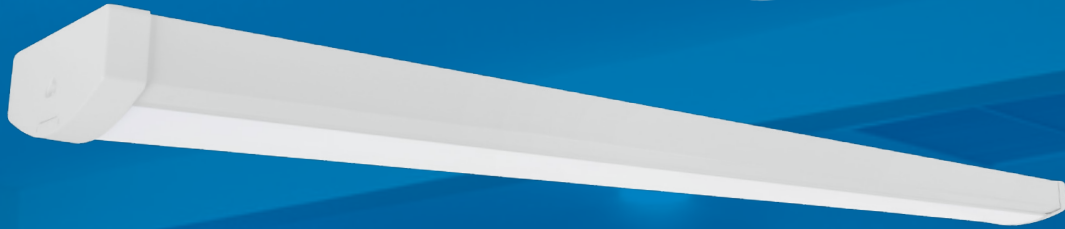

### Now That's a Wrap

Our cETLus Listed savr® 4-foot LED Wrap Light delivers 5280 lumens and is available in 4000K and 5000K. It features a sleek, low-profile design, a 110° beam angle, and 2kV surge protection.

### Features & Benefits

- Sleek, low-profile design
- 110° beam angle
- 2kV surge protection
- FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions

### Recommended Use

- Commercial/Educational Setting
- Hallways, Stairways & Warehouses
- Offices, Residential & Retail
- Storage Facilities & Manufacturing
- Task & Workshop Lighting

### Input Voltage

- Universal (120V through 277V Operation)

### Certifications




**WARNING:** Cancer and Reproductive Harm -  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)




# E-LWNO4A SERIES

47" L

5-1/2" W

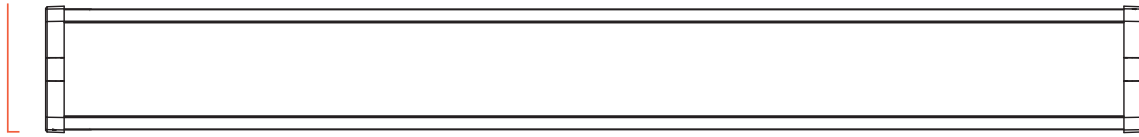

2-1/4" H



## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
47" L x 5-1/2" W x 2-1/4" H	4.3 lbs.	10 to 15 feet	1 to 1-1/2 times the mounting height

## FIXTURE SPECIFICATIONS


<b>HOUSING</b>	Durable, commercial quality, cold-rolled steel with a white powder coat finish
<b>LENS ASSEMBLY</b>	Frosted polycarbonate diffuser lens for superior light uniformity and glare reduction
<b>MOUNTING</b>	Keyhole slots provided for surface mounting to single-gang or 3" or 4" octagonal junction box

## WARRANTY & CERTIFICATIONS

<b>WARRANTY</b>	5-Year Limited
<b>cETLus LISTED</b>	Damp Locations
<b>DLC</b>	Standard

## ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-20°F to 104°F (-29°C to 40°C)	Estimated >50,000 Hours	> 0.9	< 20%	Yes, 0-10V
INPUT VOLTAGE CURRENT DRAW (AMPS)	120V	208V	240V	277V
E-LWNO4A	0.44A	0.25A	0.22A	0.19

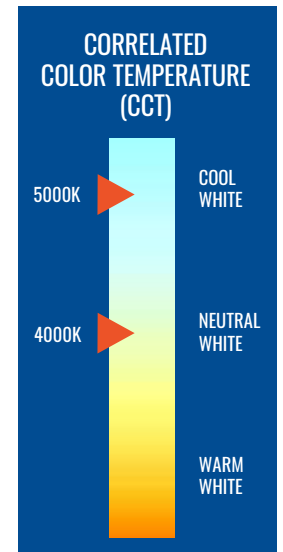

## OUTPUT SPECIFICATIONS


SKU	REPLACES	LIGHT OUTPUT	COLOR TEMP	POWER CONSUMPTION	COLOR ACCURACY
E-LWNO4A-4U840	2-lamp F32T8	5280 L	4000K	48W	≥ 80 CRI
E-LWNO4A-4U850			5000K		

# E-LWNO4A SERIES



## E-LWNO4A SERIES

Mounting Height: 10'

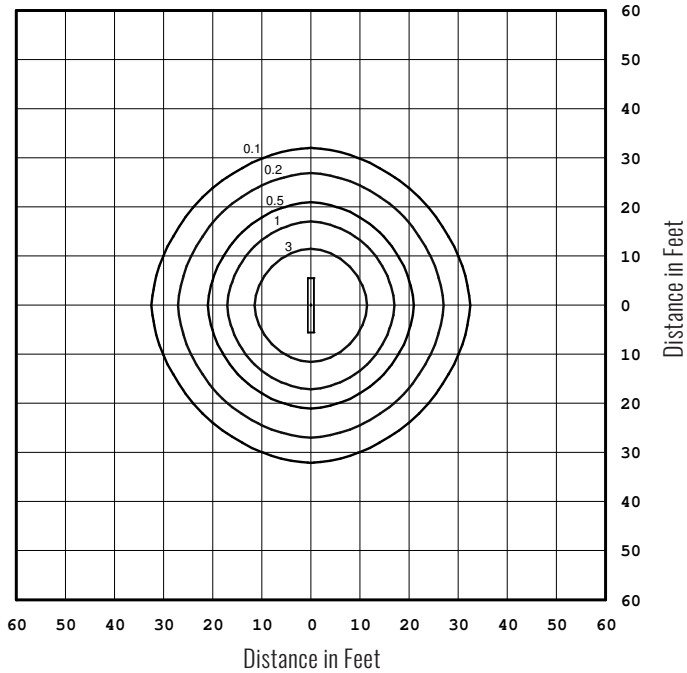

**Note:** All published photometric testing performed to IES LM-79 standards. Fixture photometry was completed on a single representative fixture. Foot candle levels are noted inside graph. Visit [e-conolight.com](http://e-conolight.com) for the latest EPA data.

© 2022 Cree Lighting, a company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. The savr logo is a registered trademark of e-conolight, LLC. The cETLus Listed Intertek logo is a trademark of Intertek Testing Services NA, Inc. The DLC QPL logo and the DLC QPL Premium logo are registered trademarks of Northeast Efficiency Partnerships, Inc.

**e-conolight /savr/ C-Lite:**  
e-conolight.com | Customer Service: 888-243-9445 | Fax: 262-504-5409  
1501 96th Street, Sturtevant, WI 53177

**Cree Lighting / C-Lite:**  
creelighting.com | Distribution/Sales: 855-617-2733  
9201 Washington Avenue, Racine, WI 53406

May 23, 2022

For informational purposes only. Content is subject to change.

