




E-WFP SERIES

LED Wall Pack
Replaces 70W MH

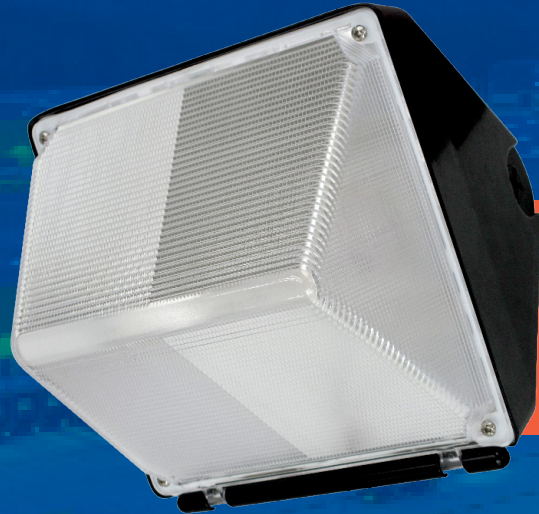

Flexibility Meets Affordability

Get the most for your dollar with our affordable savr™ LED Wall Pack. It's cULus listed, delivers 2400 lumens, and is available in 4000K and 5000K. And, with an 80+ CRI, it'll bring out the true colors of everything underneath it. Designed with an easy installation in mind, it features 4 total 1/2-inch knockouts, for the ultimate flexibility in working with surface conduits.

Features & Benefits

- Replaces 70-watt metal halide (MH)
- 34-watt LED Wall Pack with 2400 delivered lumens
- Super easy traditional installation
- Comes standard with a 6kV surge suppressor

Recommended Use

- Security
- Building Entrances
- Perimeter Lighting

Input Voltage

- 120V only


Certifications



*WARNING: Cancer and Reproductive Harm -
www.p65warnings.ca.gov



E-WFP SERIES

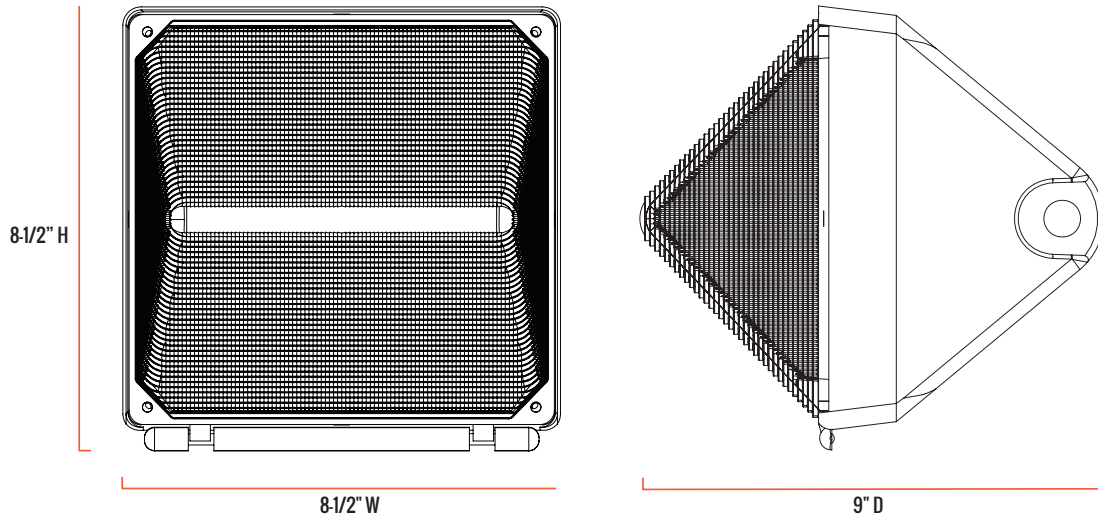

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
8-1/2" W x 8-1/2" H x 9" D	3.35 lbs.	8-20 Feet	4 to 5 times the mounting height

FIXTURE SPECIFICATIONS

HOUSING	Dark bronze, die-cast aluminum
LENS ASSEMBLY	UV stabilized polycarbonate lens
MOUNTING	Intended for wall mounting. 4 total 1/2-inch knockouts on the fixture to offer many options to run surface conduit into fixture. Knockouts are located on the top, back and either side of the housing.

WARRANTY & CERTIFICATIONS

WARRANTY	5-Year Limited
cULus LISTED	Wet Locations
DLC	-

e-conolight /savr/ C-Lite:
 e-conolight.com | Customer Service: 888-243-9445 | Fax: 262-504-5409
 1501 96th Street, Sturtevant, WI 53177

Cree Lighting US / C-Lite Distribution Sales:
 creelighting.com | Distribution/Sales: 855-617-2733
 9201 Washington Avenue, Racine, WI, 53406

April 20, 2021


For informational purposes only. Content is subject to change.



E-WFP SERIES

ELECTRICAL PERFORMANCE

OPERATING RANGE	LIFESPAN L70 AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°F to 104°F (-40°C to 40°C)	Estimated >100,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE Current Draw (Amps)	120V	208V	240V	277V
E-WFP02A	0.288A	N/A	N/A	N/A

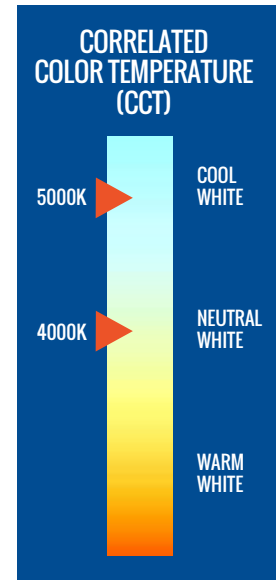

OUTPUT SPECIFICATIONS

SKU	REPLACES	LIGHT OUTPUT	COLOR TEMP	POWER CONSUMPTION	COLOR ACCURACY
E-WFP02A-N50Z	70W MH	2400 Lumens	5000K	34W	≥ 80
E-WFP02A-N40Z	70W MH	2400 Lumens	4000K	34W	≥ 80

LOCATION OF KNOCKOUTS



© 2021 Cree Lighting, a company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. The savr logo is a trademark of e-conolight, LLC. The cULus logo is a registered trademark of UL LLC.

e-conolight/savr/C-Lite:
e-conolight.com | Customer Service: 888-243-9445 | Fax: 262-504-5409
1501 96th Street, Sturtevant, WI 53177

Cree Lighting US / C-Lite Distribution Sales:
creelighting.com | Distribution/Sales: 855-617-2733
9201 Washington Avenue, Racine, WI, 53406

E-WFP SERIES



ACCESSORIES (SOLD SEPARATELY)



Universal Button Photocell (120V-277V)

SKU: JL-423CZ

USE: Photocell is field installed and drilling of the back box is required.

© 2021 Cree Lighting, a company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. The savr logo is a trademark of e-conolight, LLC. The cULus logo is a registered trademark of UL LLC.

e-conolight / savr / C-Lite:
e-conolight.com | Customer Service: 888-243-9445 | Fax: 262-504-5409
1501 96th Street, Sturtevant, WI 53177

Cree Lighting US / C-Lite Distribution Sales:
creelighting.com | Distribution/Sales: 855-617-2733
9201 Washington Avenue, Racine, WI, 53406

April 20, 2021

For informational purposes only. Content is subject to change.

