

E-ZBA Series

Prime Chime Doorbells - Rectangular & Stucco



Chime Unit & Wall Box



Polished Brass



Architectural Bronze

Make A Great First Impression!

Give your doorbell a facelift with Prime Chime. Complete with button(s), chime unit and wall box, this designer doorbell kit is easy to install and will make a big impression on your guests or clients.

Rectangular

Includes:

- Chime unit & wall box
- 2 Buttons
- 2 Chime Sounds

Recommended Use

- Commercial
- Residential

Stucco

Includes:

- Chime unit & wall box
- 1 Button
- 2 Chime Sounds

Input Voltage


- 120VAC / 60 Hz in, 9VAC / 500mA out

Certifications



WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov

E-ZBA Series

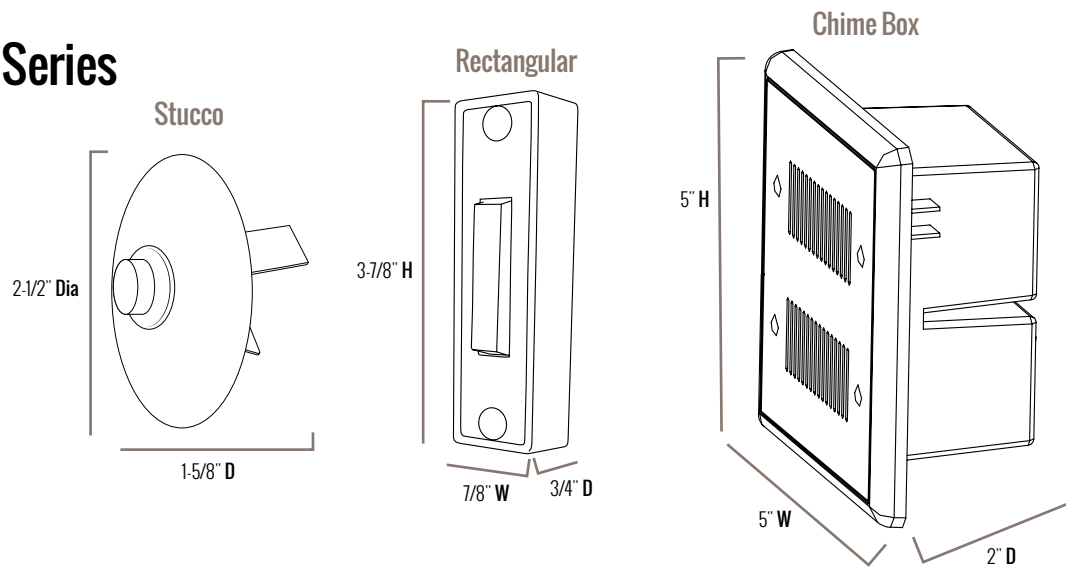

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
3/4" D x 7/8" W x 3-7/8" H (Rectangular)	1.45 lbs. (with chime box)	---	---
1-5/8" D x 2-1/2" Dia (Stucco)	1.55 lbs. (with chime box)	---	---
2" D x 5" W x 5" H (Chime Box)	1.0 lbs.	---	---

Fixture Specifications

INPUT VOLTAGE	120VAC / 60 Hz in, 9VAC / 500mA out
HOUSING	Paintable faceplate
MOUNTING	Installs into a standard two-gang dual-voltage wall box (included) Combines line and low voltage in a single unit Daisy chain capability (up to four Prime Chimes - up to 150' spacing) Recessed mounting (Stucco)

Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
1-Year Limited	Dry Locations	---	---

Output Specifications

SKU	STYLE	COLOR	LIGHT OUTPUT	BUTTONS PER KIT
E-ZBA01A-KRW	Rectangular	White	Yes	2
E-ZBA01A-KCA	Stucco	Polished Brass	Yes	1
E-ZBA01A-KCZ	Stucco	Architectural Bronze	Yes	1

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 12/29/16

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

