

C-BR30-A Series

BR30 LED Basic Series Lamps
Replaces 65W Incandescents



BEST COMBO OF PERFORMANCE AND VALUE

BR30 LED Basic lamps provide the best combination of performance and value for residential and commercial applications. These lamps deliver up to 800 lumens of 2700K and 3000K light, consuming less energy than the incandescent bulbs they replace. Plus, see the true colors of everything around you with ≥ 80 CRI.

PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 750L/800L
- CRI: ≥ 80
- CCT: 2700K, 3000K
- Input Power: 8.5W
- Dimmable: Dimmable to 10%
- Distribution: 110°
- Operating Temperature Range: -13°F to 113°F (-25°C to 45°C)
- Lifespan: Estimated 10,000 hours of maintenance-free operation to L₇₀ at 25°C (77°F)
- Power Factor: > 0.9
- Total Harmonic Distortion: < 20%
- Limited Warranty: 1 Year*
- Suitable for damp location but not for use where exposed directly to weather or water
- Suitable for use in enclosed fixtures

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Up to 94 LPW • FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions • Durable plastic housing to protect LEDs and power supply 	<ul style="list-style-type: none"> • New construction/retrofit upgrade for residential and commercial lighting 	<ul style="list-style-type: none"> • 120V

ORDERING INFORMATION


Example SKU: C-BR30-A-65W-DIM-27K-B2

PRODUCT	WATT EQUIVALENT	CRI	DIMMING	CCT	PACKAGING OPTIONS
C-BR30-A	65W		DIM		B2
C-BR30-A	65W 65 Watt, 750 (27K), 800 (30K) Lumens, 8.5W	[Blank] ≥ 80	DIM Dimming	27K Warm White (2700K) 30K Soft White (3000K)	B2 2-Lamp Pack Master Carton = (12) 2-Lamp Packs

CERTIFICATIONS:



C-BR30-A Series

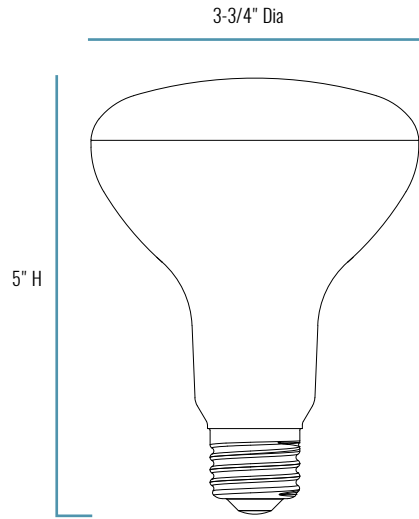

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
5" H x 3-3/4" Dia	0.2 lbs.	N/A	N/A

FIXTURE SPECIFICATIONS

HOUSING	Durable plastic housing protects LEDs and power supply
OPTICAL	Plastic globe offering increased optical spread

SKU	Lamp Type	Wattage Equivalent	CCT	Lumens	Energy Used (Watts)	Lumens Per Watt (LPW)	Rated Life (Hours)	Dimmable	Limited Warranty	Base Type	Pack Size
C-BR30-A-65W-DIM-27K-B2	BR30	65W	2700K	750	8.5	88	10,000	Yes	1 Year	E26	2
C-BR30-A-65W-DIM-30K-B2	BR30	65W	3000K	800	8.5	94	10,000	Yes	1 Year	E26	2

© 2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The cULus logo is a registered trademark of UL LLC.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: V1 08/25/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING