


E-S2A Series

LED Low-Profile Wall Sconce
Replaces 25W Incandescent

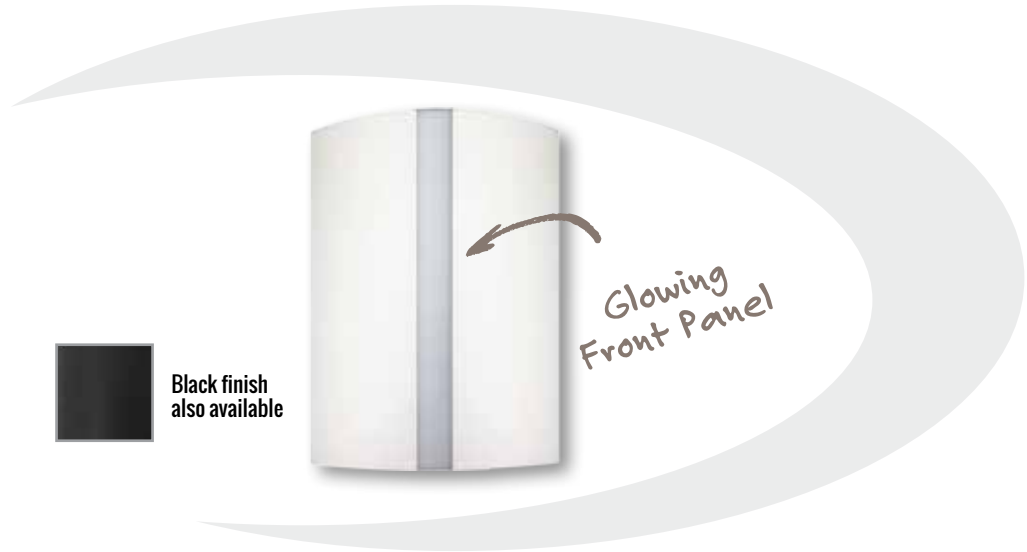

Full Functionality in a Small Package

e-conolight's low-profile wall sconce offers a new sleek design that can be utilized indoors and out for maximum versatility. Its unobtrusive profile spruces up any space, giving it an architectural flare that others will envy.

Design

- Protrudes less than 3" from wall
- ADA compliant

Recommended Use

- Hallways
- Entryways
- Perimeter lighting

Optics

- Provides up & down light and a glowing front panel for even distribution of light


Input Voltage

- Universal (120V through 277V Operation)

Certifications



E-S2A Series

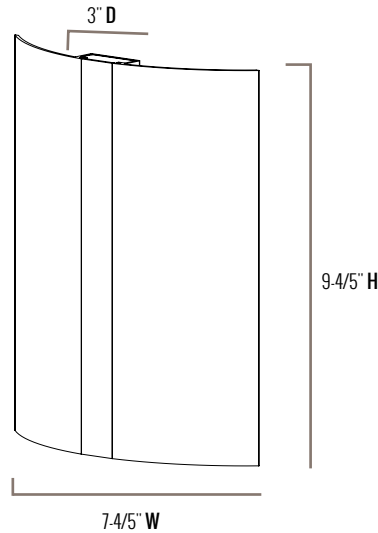

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
3" D x 7-4/5" W x 9-4/5" H	2.72 lbs.	5 to 8 feet	---

Fixture Specifications

HOUSING	Die-cast aluminum with extruded aluminum housing shade Available in black or white polyester powder-coat finish
LENS ASSEMBLY	PMMA (polymethyl methacrylate) plastic which stands out from other plastics due to its high light transmission, extremely long service life and its high resistance to UV light & weathering.
MOUNTING	Mounts to 4" square or octagonal recessed junction box


Electrical Performance

OPERATING MINIMUM	LIFESPAN <small>L₇₀ AT 25°C (77°F)</small>	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-30°C (-22°F)	Estimated 26,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (Amps)	0.07A	0.04A	0.04A	0.03A

Warranty & Certifications

WARRANTY	ETL LISTED	DLC	ENERGY STAR
5-Year Limited	Wet Locations	---	---

CORRELATED COLOR TEMPERATURE (CCT)

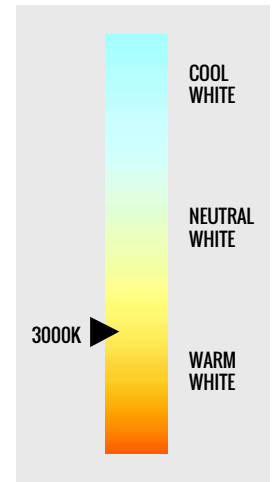

Output Specifications

SKU	LIGHT OUTPUT	COLOR TEMP <small>(See chart)</small>	POWER CONSUMPTION	COLOR ACCURACY	REPLACES
E-S2A1013UW (White)	225 Lumens	Warm White (3000K)	8W	≥ 70 CRI	25W Incandescent
E-S2A1013UK (Black)	225 Lumens	Warm White (3000K)	8W	≥ 70 CRI	25W Incandescent

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 04/22/16

1501 96th Street, Sturtevant, WI 53177 | Phone (888) 243-9445 | Fax (262) 504-5409 | www.e-conolight.com

